

The Raid Controller SA6402 is an electrostatic-discharge-sensitive device. Use precautions! Replace PCI cards and Batteries on own risk.


Open the Workstation and remove the SC6402 controller

- Follow separate instructions to open the workstation and remove the PCI card
- The first Battery is right available on the top of the SC6402.
- The second Battery is attached to the memory module, up-side-down.



Replace the 1st Battery


- Use a screw driver or another solid shaft to very carefully remove the metal clamp from the card.
- On the back side of the card find and release the two black plastic latches of the battery.

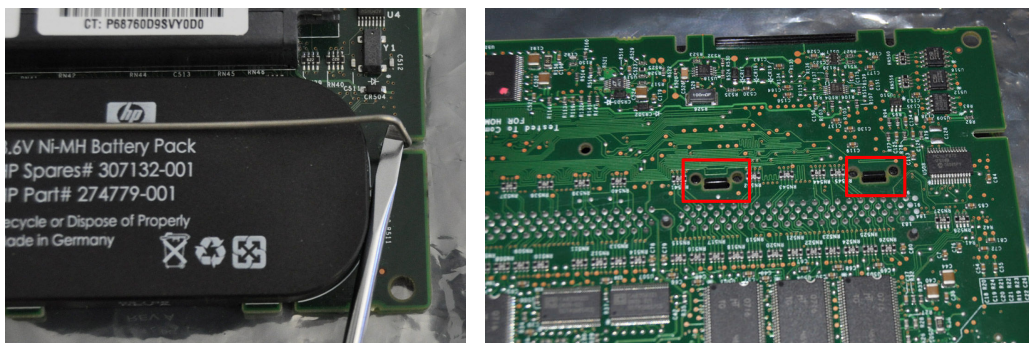

- Attach the replacement battery and metal clamp.

Replace the 2nd Battery

- Release the memory module from the PCI card by flipping the two white levers.
- Find and release the two black plastic latches of the battery.

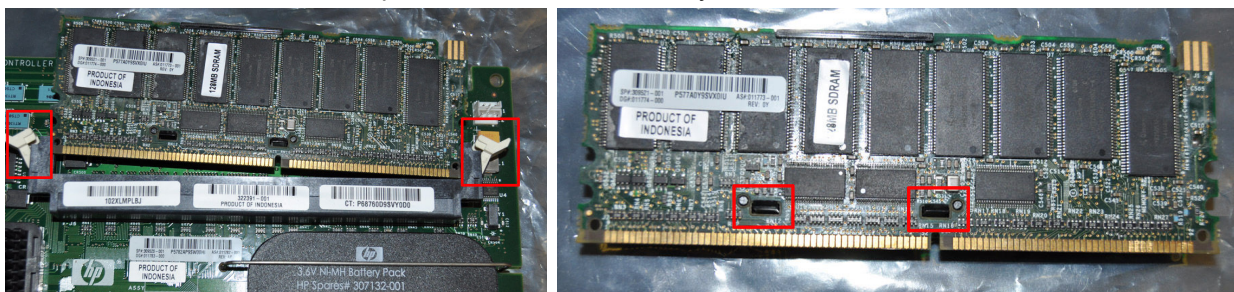

- Attach the replacement battery.
- Slide the memory module back into place and close the levers.